


For the PC Board / High-Temperature Painting Industry

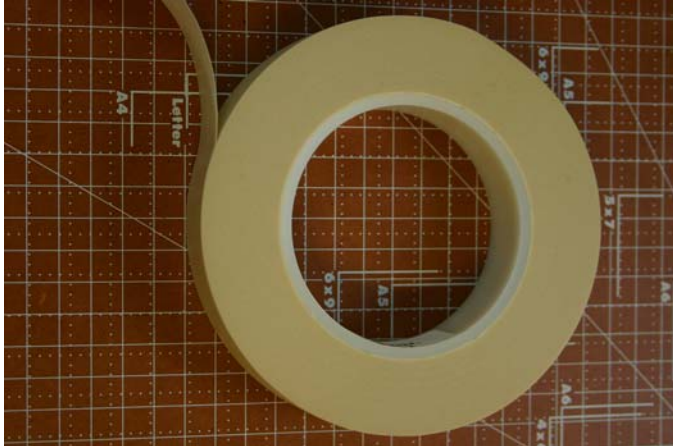

Tape No: 1-510NAT-S "HOT FLORIDA SANDS"

Features:

- Used to protect gold finger contacts during the hot air leveling/wave soldering process
- Excellent temperature resistance about 250°C for 5 seconds
- No adhesive transfer even when there is a long delay between wave soldering and tape removal

Technical Data:

Backing:	PET + Paper
Backing Thickness (mil / mm):	1+5.8 / (0.025+0.145)
Total Thickness (mil / mm):	10.4 / 0.260
Adhesion Type:	Silicone
Adhesion to Steel (gm / 25mm):	1250
Color:	Natural
Tensile Strength (kg / 25mm):	20
Elongation (%):	10
Temperature Range:	250° (482°) x 5 Sec.

Size:

Tape Length (M)	33
Tape Width (mm)	950mm available

NOTE: The above data should be considered representative only and should not be used for specification purposes.

The above mentioned data represent the average obtained in our laboratory. Suggestion for use and final results on our best technical experiences but cannot be intended as our commitment or liability. The user will determine the suitability of the product and the method of application for each specific use.